



Vrachtwagen

Volvo FM 8X4 WB-4100

Afmetingen; Lengte: 9595mm; Breedte: 2550mm; hoogte: 3700mm

Massa voertuig: 19080 kg

Technisch toelaatbare maximummassa in beladen toestand: 43000 kg (verdeeld over de 4 assen)

Aantal assen: 4

Hijskraan

HIAB - Hydraulische laadkraan 302 E-8 X - HiPro

- * voldoet aan de bepalingen in de machinerichtlijn 2006/42/EG
- * Voldoet aan de bepalingen in de richtlijn elektromagnetische compatibiliteit 2014/30/EU
- * Voldoet aan de geharmoniseerde norm EN 12999:2011+A2:2018

Afstandsbediening

2 steunpoten


Zwenkbereik: 420°

Toegelaten belasting;

- 9200kg op 2,50m
- 5100kg op 4,70m
- 3550kg op 6,30m
- 2540kg op 8,10m
- 1880kg op 10,00m
- 1460kg op 12,00m
- 1160kg op 14,10m
- 940kg op 16,30m
- 800kg op 18,60m
- 700kg op 20,90m
- 600kg op 22,40m (man verlengstuk)

Winch / lier: Rotzler -Titan TI2

Een vijfde en een zesde functie (voor rotator en grijper of klem)

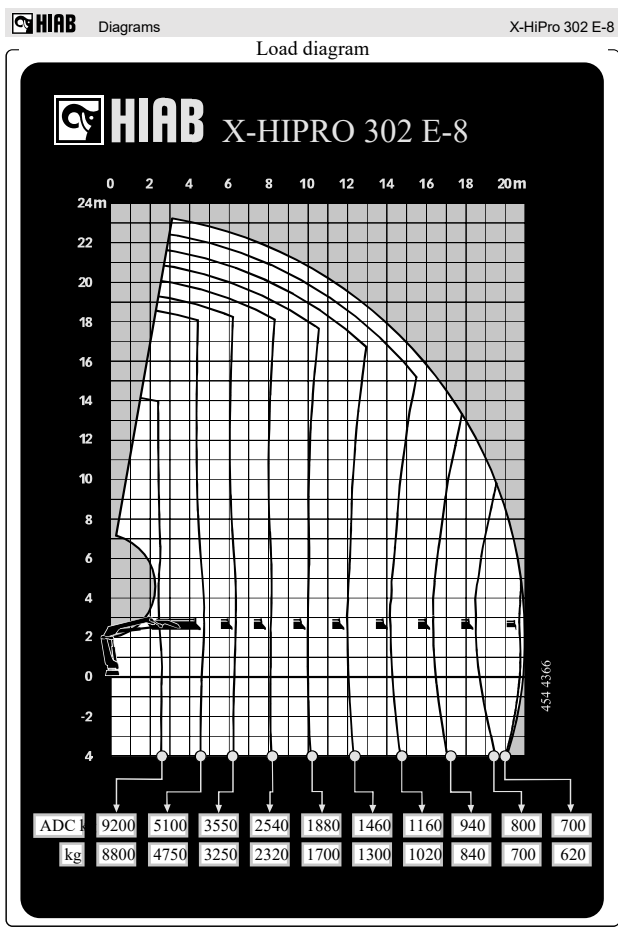

Version	X-HIPRO 302 E-8	
Max	325 kN	
Lifting capacity	kN	310
Lifting capacity	tn	22.3
Lifting capacity (ADC)	kN	230
Lifting capacity (ADC)	tn	24.1
Outreach - lifting capacity, standard	m-kN	5.5 - 6.500
		4.7 - 3.300
		6.3 - 3.150
		8.1 - 2.540
		10.8 - 1.880
		13.8 - 1.460
		14.1 - 1.360
		16.3 - 940
		18.8 - 800
		20.8 - 700
Outreach - lifting capacity, manual extensions	m-kN	22.4 - 000
Hydraulic outreach, standard	m	21.0
Hydraulic boom extension	m	15.1 m
Outreach, manual extensions	m	22.0
Lifting height above installation level, hydraulic	m	22.6 / 25.1
Rev. oil flow	l/min	98 - 120
Power needed at rec. oil flow V80	kW	-
Power needed at rec. oil flow V61	kW	-
Working pressure	MPa	33.5
Oil in tank	l	108 - 200
Tank capacity	l	8 - 135
Swinging angle	°	420
Max slope visible: full capacity	°	5
Swinging torque, gross	kNm	24.0
Swinging speed 80	°/s	15
Swinging speed	°/s	15
Lifting speed at standard hydraulic outreach	m/s	2.7
Height in folded position	mm	3.401
Width in folded position	mm	2.508
Initial space required, full boom and not included	mm	1.212
Initial space required with hose and pipe kit	mm	1.212
Weight		
Crane in standard version without support legs	kg	3.750
Top seat	kg	0
Frame attachments	kg	56 - 63
Support leg equipment	kg	301 - 467
Data sheet	X-HIPRO 302 E-8	

Containersysteem

Multilift OPT20S56

* voldoet aan de bepalingen in de machinerichtlijn 2006/42/EG

* Voldoet aan de bepalingen in de richtlijn elektromagnetische compatibiliteit 2014/30/EU



